

K2型/SK型

定向轮

平板型

φ 100 125 150

镀三价铬饰面

镀铬饰面

单轴承

双轴承

单刹车


双刹车



WK2-150




WK2-150-P (P112×53)

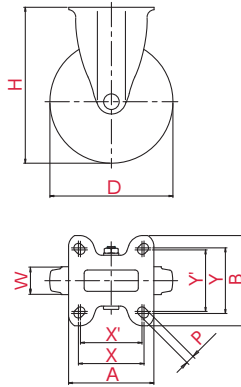


安装方法

平板型



安装底座



安装孔

主要使用示例

平板车

手推台车

服务器机架

可折叠式笼车

牵引平板车

办公椅

机械装置

复印机

家具

商品陈列柜

冷冻展示柜

其他

可并用

活动式脚轮

※照片为代表性产品示意图。

订购示例

W

K2

-

150

车轮

金属件

车轮直径



RJ2 型
P.15



RJ2-S 型
P.16

 车轮直径 D(mm)	品号	车轮材质	 允许负载 [daN(kgf)]	 破坏荷载 [daN(kgf)]	 轮宽 W(mm)	 安装高度 H(mm)	 安装底座 A×B(mm)	 孔距 X×Y(X'×Y')(mm)	 孔径 P(mm)	
100	SK-100W※	橡胶(有轴承)	120(122.4)	480(489.6)	32	132	110×80	90×50(80×45)	11	
	SK-100N	尼龙								
	SK-100GU	聚氨酯(有轴承)	100(102.0)	400(408.0)						
125	WK2-125※	橡胶(有轴承)	150(153.0)	600(612.0)	38	168	137×93	112×53(100×56)	11	
	NWRK2-125				34					
	NK2-125	尼龙			40					
	GUK2-125	聚氨酯(有轴承)								
150	WK2-150※	橡胶(有轴承)	180(183.6)	720(734.4)	40	190	104×110	80×80(75×75)	11	
	NWRK2-150		160(163.2)	640(652.8)	34					
	NK2-150	尼龙(有轴承)			40					
	GUK2-150	聚氨酯(有轴承)	180(183.6)	720(734.4)			34			
	WK2-150(P112×53)※	橡胶(有轴承)						160(163.2)		640(652.8)
	NWRK2-150(P112×53)									
	NK2-150(P112×53)	尼龙(有轴承)	180(183.6)	720(734.4)						
	GUK2-150(P112×53)	聚氨酯(有轴承)								

※橡胶(有轴承)可制作灰橡胶型。

车轮
种类



W
内轮:钢板
车轮:橡胶(有轴承)



NWR
内轮:尼龙
车轮:橡胶(有轴承)



N
内轮:尼龙
车轮:尼龙



N
内轮:尼龙
车轮:尼龙(有轴承)



GU
内轮:尼龙
车轮:聚氨酯
(有轴承)