

RJ2-S型

● 万向轮

☑ 平板型

Φ 100 125 150

镀三价铬饰面

镀铬饰面

单轴承


双轴承

单刹车

双刹车




RJ2-150NWS

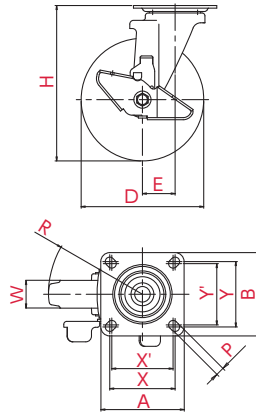


安装方法

☑ 平板型



安装底座



安装孔

主要使用示例

- 平板车
- 手推台车
- 服务器机架
- 可折叠式笼车
- 牵引平板车
- 办公椅
- 机械装置
- 复印机
- 家具
- 商品陈列柜
- 冷冻展示柜
- 其他

※照片为代表性产品示意图。

订购示例

RJ2

-

150

NWR

S

金属件

车轮直径

车轮

带刹车

▼ 可并用

固定式脚轮



K2 型
P.17



SK 型
P.17

 车轮直径 D(mm)	品号	车轮材质	 允许负载 [daN(kgf)]	 破坏荷载 [daN(kgf)]	 轮宽 W(mm)	 安装高度 H(mm)	 安装底座 A×B(mm)	 孔距 X×Y(X'×Y')(mm)	 孔径 P(mm)	 偏心 E(mm)	 旋转半径 R(mm)
100	RJ2-100NRPS	橡胶	120(122.4)	480(489.6)	30	132	90×90	71×71(68×68)	11	34	88
	RJ2-100WS	橡胶(有轴承)			32						
	RJ2-100NS	尼龙									
	RJ2-100GUS	聚氨酯(有轴承)	100(102.0)	400(408.0)							
125	RJ2-125WS	橡胶(有轴承)	150(153.0)	600(612.0)	38	168	102×102	80×80(75×75)	11	38	104
	RJ2-125NWRS				34						
	RJ2-125NS	尼龙			40						
	RJ2-125GUS	聚氨酯(有轴承)									
150	RJ2-150WS	橡胶(有轴承)	160(163.2)	640(652.8)	40	190	102×102	80×80(75×75)	11	40	115
	RJ2-150NWRS				34						
	RJ2-150NS	尼龙(有轴承)			40						
	RJ2-150GUS	聚氨酯(有轴承)									

车轮
种类



NRP
内轮: 尼龙
车轮: 橡胶



W
内轮: 钢板
车轮: 橡胶(有轴承)



NWR
内轮: 尼龙
车轮: 橡胶(有轴承)



N
内轮: 尼龙
车轮: 尼龙



N
内轮: 尼龙
车轮: 尼龙(有轴承)



GU
内轮: 尼龙
车轮: 聚氨酯
(有轴承)

用于低床板中／重负荷

用于中／重负荷

带冲击吸收功能

OTHERS