

UHG型


● 万向轮 平板型

Φ 50 65 75 80 100

镀三价铬饰面	镀铬饰面
单轴承	双轴承
单刹车	双刹车



UHG-75GFB

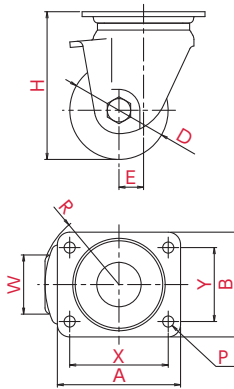

安装方法 平板型



主要使用示例

- 平板车
- 手推台车
- 服务器机架
- 可折叠式笼车
- 牵引平板车
- 办公椅
- 机械装置
- 复印机
- 家具
- 商品陈列柜
- 冷冻展示柜
- 其他

▼ 可并用 固定式脚轮

※照片为代表性产品示意图。

订购示例 **UHG** - **75** **GFB**
金属件 车轮直径 车轮



 车轮直径 D(mm)	品号	车轮材质	 允许负载 [daN(kgf)]	 破坏荷载 [daN(kgf)]	 轮宽 W(mm)	 安装高度 H(mm)	 安装底座 A×B(mm)	 孔距 X×Y(X'×Y')(mm)	 孔径 P(mm)	 偏心 E(mm)	 旋转半径 R(mm)
50	UHG-50GFB	强化尼龙(有轴承)	300(306.0)	1,200(1,224.0)	38	79	84×84	64×64	8.5	12	49
	UHG-50MC※ ¹	浇铸尼龙(有轴承)(蓝)	400(408.0)	1,600(1,632.0)							
	UHG-50MCE	● 导电性浇铸尼龙(有轴承)									
	UHG-50PB	苯酚(有轴承)									
65	UHG-65GFB	强化尼龙(有轴承)	400(408.0)	1600(1,632.0)	48	97	100×100	78×78	10.5	14	54
	UHG-65MC※ ¹	浇铸尼龙(有轴承)(蓝)	600(612.0)	2,400(2448.0)							
	UHG-65MCE	● 导电性浇铸尼龙(有轴承)									
	UHG-65PB	苯酚(有轴承)									
75	UHG-75GFB	强化尼龙(有轴承)	500(510.0)	2,000(2,040.0)	48	107	100×100	78×78	10.5	14	54
	UHG-75MC※ ¹	浇铸尼龙(有轴承)(蓝)	700(714.0)	2,800(2,856.0)							
	UHG-75MCE	● 导电性浇铸尼龙(有轴承)									
	UHG-75PB	苯酚(有轴承)									
80	UHG-80MC※ ²	浇铸尼龙(有轴承)(深藏青)	800(816.0)	3,200(3264.0)	48	120	100×85	80×60	9.0	20	63
100	UHG-100MC※ ²	浇铸尼龙(有轴承)(深藏青)	800(816.0)	3,200(3264.0)	48	140	150×110	121×59	13.0	20	72

●符号

导电性浇铸尼龙的电阻值为10⁵Ω以下。
(为我公司检测值,并非保证值)

车轮种类



GFB
内轮:强化尼龙
车轮:强化尼龙
(有轴承)



MC
内轮:浇铸尼龙
车轮:浇铸尼龙
(有轴承)(蓝)



MC
内轮:浇铸尼龙
车轮:浇铸尼龙
(有轴承)(深藏青)



MCE
内轮:导电性浇铸尼龙
车轮:导电性浇铸尼龙
(有轴承)



PB
内轮:苯酚
车轮:苯酚(有轴承)